


# H&H HDA Heavy Duty Flatbed Trailers

## Standard Features

- 6" aluminum channel tongue & frame.
- 3" aluminum channel crossmembers.
- Powder coated steel substructures.
- 2<sup>7</sup>/<sub>16</sub>" A-frame Posi-Lock coupler with dual safety chains.
- 5000lb set-back jack.
- Treated 2x8 wood decking.
- Rectangular aluminum tube headache rack.
- Multiple stake pocket tie-downs with rub rails.
- 6061-T6 Billet aluminum extruded 5' 3" ramps with carrier.
- Removable teardrop fenders.
- Tandem 3500lb spring axles with EZ lube hubs – 7000lb GVWR
- 4-wheel electric brakes with break-away kit & battery.
- ST205/75R15 radial tires on white wheels.
- Full LED lighting system with Slimline LED taillights.
- Wiring enclosed in conduit.

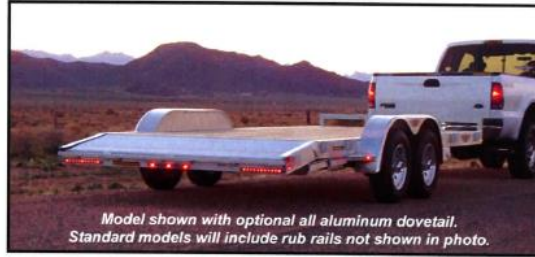

| MODEL        | DESCRIPTION                             | DECK WIDTH | DECK LENGTH |
|--------------|---|------------|-------------|
| 8.5 HDA16 AL | 8.5x16' HDA Aluminum Heavy Duty Flatbed | 82"        | 16ft        |
| 8.5 HDA18 AL | 8.5x18' HDA Aluminum Heavy Duty Flatbed | 82"        | 18ft        |
| 8.5 HDA20 AL | 8.5x20' HDA Aluminum Heavy Duty Flatbed | 82"        | 20ft        |



*Excellent Corrosion Resistance, Strength, & Longevity*

| Upgrade Options                     | Description  |
|-------------------------------------|--|
| Extruded Aluminum Decking           | Plank style.   |
| 2' All Aluminum Dovetail            | Full aluminum dovetail.  |
| 2' Aluminum Dovetail with Wood Deck | Aluminum framed wood dovetail.   |
| 9990lb GVWR                         | Includes tandem 5200lb brake axles, 8" channel aluminum frame upgrade, 14" on center crossmember spacing, drop-down dock legs, ST225/75R15 radials on 6-bolt white wheels, break-away kit with battery.  |
| 12000lb GVWR                        | Includes tandem 6000lb brake axles, 8" channel aluminum frame upgrade, 14" on center crossmember spacing, drop-down dock legs, ST235/80R16 radials on 8-bolt white wheels, break-away kit with battery, DOT reflective tape.                           |
| 14000lb GVWR                        | Includes tandem 7000lb brake axles, 8" channel aluminum frame upgrade, 4" channel crossmembers, 14" on center cross member spacing, drop-down dock legs, ST235/80R16 radials on 8-bolt white wheels, break-away kit with battery, DOT reflective tape. |
| Aluminum Wheels                     | Upgrade to radial tires on aluminum wheels.  |
| Rock Guard Car Faring               | Powder-coated steel tube and formed ATP.   |
| Custom Aluminum Toolbox             | 0.100 Aluminum Tread Bright with lockable stainless steel paddle latch.  |

*Additional options may be available.*

H&H TRAILERS LLC STRONGLY RECOMMENDS HITCHING YOUR TRAILER TO YOUR TOW VEHICLE BEFORE LOADING!  
PHOTOS MAY SHOW OPTIONAL EQUIPMENT. MODELS AND OPTIONS ARE SUBJECT TO CHANGE.